

TrelleborgVibracoustic (Ed.)

Automotive Vibration Control Technology

Fundamentals, Materials, Construction, Simulation, and Applications



Vogel Business Media

 TrelleborgVibracoustic

TrelleborgVibracoustic (Ed.)

Automotive Vibration Control Technology

TrelleborgVibracoustic (Ed.)

Automotive Vibration Control Technology

Fundamentals, Materials, Construction,
Simulation, and Applications

Vogel Business Media

We welcome your comments and suggestions regarding the content of this reference book.
Please e-mail nvh@tbvc.com

ISBN E-Book: 978-3-8343-6204-9

1st edition, 2015

All rights reserved including translation. No part of this work may be reproduced, processed using any type of electronic system, duplicated or transmitted in any way or in any form (printing, photocopying, microfilm or using any other process) without the express written consent of the publisher. The exceptions stated expressly in Para. 53, 54 of the German Copyright Act are not affected.

Printed in Germany

Copyright 2015 by Vogel Business Media GmbH, Würzburg, Germany

Editorial editors: Peter L. Albrecht and Siegfried Binder

Cover design: 3st kommunikation GmbH, Mainz, Germany

Foreword

Modern vehicles incorporate a host of systems and components enabling safe and comfortable driving. Vibration control technology makes an especially important contribution, as it helps to isolate and dampen the unwanted noises and vibrations caused by drive systems and road irregularities. As the world's leading supplier of automotive vibration control technology, we know the challenges this poses to the developers and builders of motor vehicles. Accordingly, a team of experts at TrelleborgVibracoustic have produced a practical compendium for anyone involved in the field.

As a result of this work, we are pleased to present this reference book, *Automotive Vibration Control Technology*. Our aim has been to answer many of the questions concerning vibration control technology in vehicles – fundamental as well as topical ones. What influence do lightweight design, new drive systems and more stringent environmental demands have on vehicles' vibration behaviour? What benefits does rubber have as a material, and for which applications is polyurethane more suitable? How should a component be designed to work well within a comprehensive system? What intelligent vibration control technology solutions can meet the demand for more comfort at lower cost?

In the first part of the book we explain the fundamentals of isolating and damping vibrations in vehicles, beginning with the development of materials, moving through research, design and production processes, and ending with durability testing. The second part discusses fields of application involving powertrain and chassis technology in passenger and commercial vehicles.

We would like to thank all of the authors and their staff, as well as our development partners and customers who have all contributed to this book with their expertise and many suggestions.

We hope this book will be both stimulating and useful to our readers.

Darmstadt, July 2015

TrelleborgVibracoustic
The Management Board

Table of Contents

Part 1 Fundamentals

1.	Vibration Control Technology for the Automotive Industry	1
1.1	Fundamentals and requirements of vibration control technology	1
1.2	Vibration control technology in automotive engineering	1
2.	Isolation, Damping, and Absorption	5
2.1	A material becomes predictable	5
2.2	The principles of vibration isolation	6
2.3	Four-pole theory: an approach to describing the isolation of high frequencies	9
2.3.1	Mechanical impedance	9
2.3.2	Mechanical four-pole systems	10
2.3.3	Coupling of four-pole systems	12
2.3.4	Isolation calculations using four-pole systems	14
2.3.4.1	Transmission loss	14
2.3.4.2	Transmission loss with reference to velocity	14
2.3.4.3	Transmission loss with reference to force	15
2.3.4.4	Insertion loss	15
2.3.4.5	Example: shock absorber top mount for a car suspension	16
2.4	Effects of damping and friction on isolation	18
2.4.1	Introduction	18
2.4.2	The effect of speed-proportional damping	20
2.4.3	The effect of friction	22
2.5	Vibration absorption	27
3.	Vibration Control Materials	29
3.1	Introduction	29
3.2	Elastomers – an extraordinary class of materials	29
3.2.1	Energy elasticity	29
3.2.2	Entropy elasticity	30
3.3	Base polymer – or crude rubber (caoutchouc)	30
3.3.1	Introduction	30
3.3.2	Natural and synthetic rubber	30
3.4	Elastomeric materials – overview of typical material properties	32
3.4.1	Introduction	32
3.4.1.1	NR – natural rubber	32
3.4.1.2	IR – isoprene rubber	33
3.4.1.3	BR – butadiene rubber	33
3.4.1.4	SBR – styrene-butadiene rubber	33
3.4.1.5	CR – chloroprene rubber	34
3.4.1.6	NBR – acrylonitrile butadiene rubber	34
3.4.1.7	HNBR – hydrogenated nitrile butadiene rubber	34
3.4.1.8	IIR – isobutene-isoprene rubber	35

	3.4.1.9	EPDM – ethylene propylene diene terpolymer rubber	35
	3.4.1.10	ACM – acrylic rubber	35
	3.4.1.11	AEM – ethylene acrylic rubber	36
	3.4.1.12	FKM – fluorinated rubber	36
	3.4.1.13	ECO – epichlorohydrin rubber	36
	3.4.1.14	VMQ – silicone rubber	37
	3.4.1.15	AU and EU – polyester and polyether urethane rubber	37
3.5		Natural rubber – discovery and history, properties and application	37
	3.5.1	Introduction	37
	3.5.2	Crude natural rubber – production processes and properties	42
	3.5.3	TSR – technically specified rubber	44
	3.5.4	Synthetic “natural rubber”	48
	3.5.5	NR compounds and vulcanizates – typical properties	48
	3.5.6	Strength – reinforcement – self-reinforcement	49
	3.5.7	Heat resistance – aging	50
	3.5.8	Properties in cold conditions	50
	3.5.9	Applications	51
	3.5.10	Future prospects	52
3.6		Compounding and vulcanization	54
	3.6.1	Ingredients of compounds	55
	3.6.1.1	Introduction	55
	3.6.1.2	Crosslinking systems	56
	3.6.1.3	Special case: thermoplastic elastomers (TPE)	56
	3.6.1.4	Fillers	57
	3.6.1.5	Plasticizers	57
	3.6.1.6	Anti-aging agents	57
	3.6.1.7	Processing agents	58
	3.6.1.8	Production of raw compound	58
	3.6.1.9	Testing and approval	59
	3.6.1.10	Vulcameter testing	60
3.7		Molding and vulcanization	62
	3.7.1	Compression molding	63
	3.7.2	Transfer molding	63
	3.7.3	Injection molding	64
	3.7.4	Rubber-metal bonding	64
3.8		Elastomers for vibration control – an overview	65
	3.8.1	Aging resistance	67
	3.8.2	Cold resistance	67
	3.8.3	Temperature limits	69
3.9		Component groups – engineered materials	70
	3.9.1	Materials for chassis components	70
	3.9.2	Materials for spring elements and body mounts: applications for MCU	72
	3.9.3	Materials for power train components – engine and transmission mounts	73

3.9.3.1	Material properties	73
3.9.3.2	Shore hardness	76
3.9.3.3	Materials for engine mounts	77
3.9.4	Materials for torsional vibration dampers	79
3.9.5	Materials for couplings and decoupling pulleys	82
3.9.6	Materials for absorbers	83
3.9.7	Materials for airsprings	84
3.9.8	The future of elastomers in vibration control	85
3.10	Bonding technology	86
3.10.1	Substrates for bonded elastomer components	86
3.10.1.1	Metals	86
3.10.1.2	Plastics	87
3.10.1.3	Metals and plastics	88
3.10.2	Elastomers for bonded rubber-metal components	88
3.10.3	Pre-treatment of substrates	89
3.10.3.1	Cleaning processes	90
3.10.3.2	Blast cleaning	92
3.10.3.3	Phosphating process for steel parts	93
3.10.3.4	Conversion processes for aluminum	98
3.10.4	Bonding agents for composite elastomer parts	100
3.10.4.1	Historical development of bonding agents	100
3.10.4.2	Physical and chemical principles of bonding	100
3.10.4.3	Bonding agent manufacturers and their products	102
3.10.4.4	Future trends in bonding agents	103
3.10.5	The bonding mechanism	103
3.10.5.1	Composition of bonding agents	103
3.10.5.2	Reactions of bonding agents	104
3.10.5.3	Reactions during vulcanizing	104
3.10.5.4	Crosslinking reactions in bonding systems	105
3.10.6	Application of bonding agents	107
3.10.6.1	Application methods	107
3.10.6.2	Measuring the thickness of bonding agent layers	110
3.10.7	Bonding tests	113
3.10.7.1	Bonding tests on finished components	113
3.10.7.2	Tests on specimens	113
3.10.7.3	Non-destructive testing	114
3.10.8	Ruptures of bonded rubber-metal components	114
3.10.8.1	Typical failure types	114
3.10.8.2	Possible causes of failure	116
3.10.8.3	Damage analysis	116
4.	From System Knowledge to a Better Component	117
4.1	From system description to component specification	117
4.2	From specification to component design	118
4.3	Component design	124
4.3.1	Spring design using finite element analysis	124
4.3.2	Service life prediction and spring optimization	125
4.3.3	Weight reduction by automatic contour optimization	127

5.	Component Production	131
5.1	The single-loop development approach	131
5.2	From component drawing to sample production	133
5.2.1	Divergent requirements for component and mold design	133
5.2.2	Mold flow simulation	134
5.2.3	The first sample	134
5.2.4	The production process	135
5.2.5	Production parameters	135
6.	Testing in the “Single-Loop” Era	137
6.1	Fatigue strength testing – history and motivation	137
6.2	Fatigue strength of elastomeric mounts	138
6.3	Virtual endurance test	139
6.4	Statistical basis	143
6.5	Reducing test duration by omission	148
6.6	Assessment of temperature effect	154
6.7	Conclusion	155

Part 2 Applications

7.	Engine and Transmission Mounts	157
7.1	Mounting systems	157
7.1.1	System design objectives	157
7.1.2	Mount configurations	158
7.1.2.1	Basic principle of separation of functions	158
7.1.2.2	Front-wheel drive with transverse engine	158
7.1.2.3	Four-point mounting	159
7.1.2.4	Pendulum mounting system	161
7.1.3	Standard drivetrain	162
7.1.3.1	Three-point mounting	162
7.1.3.2	Four-point mounting	163
7.1.4	Mounting system design tools	164
7.1.4.1	Modeling with multibody systems	164
7.1.4.2	Vehicle tests	172
7.1.5	Notes on the practical design of mounting systems	176
7.1.5.1	Static behavior	176
7.1.5.2	Eigenfrequencies	177
7.1.5.3	Idling	178
7.1.5.4	Transient events	179
7.2	Basic principles of mounting systems	180
7.2.1	Definitions	180
7.2.2	Functions of engine and transmission mounts	181
7.2.3	Elastomeric springs	182
7.2.4	Metal and plastic parts for engine and transmission mounts	187
7.2.5	Fluids for mounts	189
7.3	Elastomeric compounds for engine and transmission mounts	190

7.3.1	Requirements for elastomeric compounds and related materials	190
7.3.1.1	Requirements	190
7.3.1.2	Rubber varieties for elastomers, and their properties	192
7.3.2	Damping and dynamic hardening	194
7.3.3	Creep and high-temperature behavior	194
7.4	Elastomeric mounts	196
7.4.1	Compression mounts	196
7.4.1.1	Circular mounts	196
7.4.1.2	Rectangular mounts	198
7.4.2	Bushings	199
7.4.2.1	Crush tube bushing	199
7.4.2.2	Rotationally symmetric bushing with internal and external bonding	199
7.4.2.3	Bushings as adapted mount elements	200
7.4.3	Symmetrical angled mounts (roof-shaped or wedge mounts)	203
7.4.4	Modular mount	204
7.4.5	Torque rods	206
7.4.6	Special rubber-metal designs	209
7.5	Conflicting objectives of elastomeric mount elements	210
7.6	Engine and transmission mounts with hydraulic damping	212
7.6.1	Introduction	212
7.6.2	Effects of diaphragm travel on damping with decoupling by a loose diaphragm	219
7.6.3	Acoustic optimization	220
7.6.4	Semi-decoupled nozzle-diaphragm systems	221
7.6.5	Cavitation	222
7.6.6	Examples of mounts	225
7.6.6.1	Mount with stops	225
7.6.6.2	Hydromount with torque stabilization and stops	229
7.6.6.3	Hydromount with tension restraint	231
7.6.6.4	Box-type mount	232
7.6.6.5	Modernized and cost-optimized box-type hydromount	234
7.6.6.6	Hanging engine mounts	235
7.7	Hydrobushings	238
7.8	Air-damped mounts	241
7.8.1	Introduction	241
7.8.2	Theory of air damping (practical approach)	243
7.8.3	Comparison between air damping and hydraulic damping	244
7.8.4	Parameter study	246
7.8.4.1	Variation of pneumatic diameter	247
7.8.4.2	Variation of enclosed air volume	247
7.8.4.3	Variation of static stiffness	248
7.8.4.4	Variation of excitation amplitude	248
7.8.4.5	Variation of nozzle diameter	249

7.8.5	Switchable mounts	250
7.9	Switchable engine mounts	251
7.9.1	Electrically switchable engine mounts	251
7.9.2	Pneumatically switchable hydromounts	254
7.9.3	Switchable mounts with automatic diaphragm travel adjustment	258
7.10	Active Vibration Control	260
7.10.1	Introduction	260
7.10.2	History	261
7.10.3	AVC system options	262
7.10.3.1	Open-loop control	262
7.10.3.2	Closed-loop control	263
7.10.4	AVC system components	264
7.10.4.1	The actuator (options)	264
7.10.4.2	The electrodynamic actuator	265
7.10.4.3	The electronic control unit (ECU)	266
7.10.4.4	The "error" sensor	266
7.10.5	Case studies	267
7.10.6	Outlook	268
7.11	Responses to market requirements	269
7.11.1	Functional improvements and cost reduction for engine and transmission mounts in connection with vehicle development	269
7.11.2	Modular toolkits	272
7.11.2.1	Introduction	272
7.11.2.2	Further development of a toolkit with simple and unconventional solutions	272
7.11.3	Special customized solutions	278
7.11.3.1	Hydromount with integrated absorber	278
7.11.3.2	Hydromount/switchable hydromount with double isolator	279
7.11.3.3	Hydromount with automatic hydraulic idle absorber	280
7.11.3.4	Hydromount with silicone supporting spring and local silicone protective cap	283
7.11.4	Innovation: active mounts	285
7.12	Summary	288
7.13	Guiding principles for engine and transmission mount design	289
8.	Chassis Mounts	291
8.1	Ride comfort or driving safety	291
8.1.1	The sports car chassis	291
8.1.2	Definition of "ride comfort"	292
8.1.3	The definition of "safe handling"	292
8.2	Rubber-metal suspension components	295
8.2.1	Rubber-metal parts allow wheel spring travel	295
8.2.2	Rubber-metal elements allow maintenance-free axles	296
8.2.3	Rubber-metal components control suspension kinematics	297

8.2.4	Rubber-metal mounts support demanding specifications ..	298
8.2.5	Rubber-metal mounts absorb bumps	300
8.2.6	Rubber-metal elements isolate vibrations	302
9.	Rubber-to-Metal Mounts for Commercial Vehicles	307
9.1	Engine mounts for medium and heavy trucks	307
9.1.1	Design	307
9.1.1.1	Systems	307
9.1.1.2	Fixation	308
9.1.1.3	Bump Stops	309
9.1.1.4	Characteristic curves	309
9.1.1.5	Available space	309
9.1.1.6	Rubber-to-metal body	309
9.1.2	Materials	310
9.1.2.1	Elastomers	310
9.1.2.2	Bracket materials	311
9.1.2.3	Conclusion	311
9.2	Chassis mounts	312
9.2.1	Chassis with leaf springs (front/rear axle)	312
9.2.2	Chassis with air springs	313
9.3	Cab mounts	315
9.3.1	Introduction	315
9.3.2	Functions	316
9.3.3	Technical requirements for component development	316
9.3.4	Component design	317
9.3.5	Service life and functionality	317
9.4	Special mounts	317
9.4.1	Battery case suspension	317
9.4.1.1	Loads and requirements	317
9.4.1.2	Component design	318
9.4.1.3	Component configurations	318
9.4.2	Control box mounts	319
10.	Air Springs	321
10.1	The use of air springs in vehicle technology	321
10.1.1	Fields of application	321
10.1.2	Comparison of different spring systems for passenger cars	322
10.1.2.1	Air spring system	322
10.1.2.2	Level control with secondary air springs	323
10.1.2.3	Hydropneumatic system	323
10.1.2.4	Nivomat	324
10.1.2.5	Adjustable suspension	325
10.1.2.6	Active Body Control (ABC)	325
10.1.2.7	Active Electromagnetic Body Control	326
10.1.3	Advantages of air spring systems	326
10.1.4	The configuration of an air spring system in the vehicle ...	327
10.1.5	Air supply system	328

	10.1.5.1	Introduction	328
	10.1.5.2	Control units for air suspension systems	329
	10.1.6	Passenger car air spring requirements	330
10.2		Function and physical principles of air springs	332
	10.2.1	The gas cushion as a spring	332
	10.2.2	The function of the air spring bellows	333
	10.2.3	Force and spring rate as design parameters	335
	10.2.4	How can the characteristic curve of an air spring be modified?	336
10.3		Design and characteristics of air spring bellows	338
	10.3.1	Convolute air springs, type 1B and 2B	338
	10.3.2	Convolute air springs type 1A	339
	10.3.3	Rolling air springs	340
	10.3.4	Sleeve-type air springs – bellows and connections (push-on, crimping, clamping)	341
	10.3.5	Thread orientation: Comparison of axial and cross-ply bellows	342
	10.3.6	Bellows properties and their effects on the vehicle	344
10.4		Configuration and design of air springs	345
	10.4.1	Suspension strut or separate air spring	345
	10.4.2	Special requirements and designs	347
	10.4.3	Example of a passenger car application	349
	10.4.4	Example of a commercial vehicle application	351
	10.4.5	Example of a railway rolling stock application	351
10.5		Production of air springs	353
	10.5.1	Components of air spring bellows	353
	10.5.2	Semi-finished products – rubber and fabrics	353
	10.5.3	Bead inserts	353
10.6		Reinforcing layers	354
	10.6.1	Nylon cord fabric	354
	10.6.2	Thread specifications	354
	10.6.3	Thread structure	354
	10.6.4	Selection of thread structure	355
	10.6.5	Structure of the bellows wall	355
	10.6.6	Design	356
10.7		Responses to specific market requirements	356
11.		Torsional Vibration Dampers	359
11.1		Cranktrain	359
	11.1.1	Introduction	359
	11.1.2	History	360
	11.1.3	Types of rubber torsional vibration dampers	361
		11.1.3.1 Introduction	361
		11.1.3.2 Pressed torsional vibration damper	362
		11.1.3.3 Vulcanized torsional vibration dampers	363
	11.1.4	Design of torsional vibration dampers	364
		11.1.4.1 Introduction	364
		11.1.4.2 Multibody simulation model	365

	11.1.4.3	Solution of the differential equation system	366
	11.1.4.4	Validation of the simulation model	369
	11.1.4.5	Assessment of the results	370
	11.1.5	Outlook	371
11.2		Damper isolator pulleys for auxiliary devices	373
	11.2.1	Introduction	373
	11.2.2	Structure of a damper isolator pulley	375
	11.2.3	Design of damper isolator pulleys	375
	11.2.3.1	The belt drive as a rotational vibration system	375
	11.2.3.2	Design criteria	377
	11.2.3.3	Validation of the simulation model	379
	11.2.4	Outlook	380
12.		Absorbers	383
12.1		Linear absorbers	383
	12.1.1	Mode of operation and applications of linear absorbers	383
	12.1.1.1	Transmission absorbers	384
	12.1.1.2	Steering wheel absorber/airbag absorber	385
	12.1.1.3	Chassis absorbers/convertible absorbers	385
	12.1.1.4	Active linear absorbers	386
	12.1.1.5	Hydraulic absorbers	387
	12.1.2	Design and sizing principles for linear absorbers	388
	12.1.2.1	Spring stiffness	389
	12.1.2.2	Damping	389
	12.1.2.3	Inertia mass	389
	12.1.2.4	Resonant frequency	391
	12.1.3	Design and structure of linear absorbers	393
	12.1.4	Responses to market-specific requirements	395
12.2		Rotational vibration absorbers	395
	12.2.1	Mode of operation and applications of rotational vibration absorbers	395
	12.2.2	Design principles for rotational vibration absorbers	396
	12.2.3	Design and structure of rotational vibration absorbers	397
	12.2.4	Response to market-specific requirements	398
12.3		Driveshaft mounting, centering, and torque transmission components	399
	12.3.1	Mode of operation and applications	399
	12.3.2	Design principles	399
13.		Fundamentals of Polyurethane (PUR) as a Springing and Damping Material	405
13.1		Introduction	405
13.2		Basic chemistry	406
	13.2.1	Isocyanates	406
	13.2.2	Polyols	408
	13.2.2.1	Polyethers	408
	13.2.2.2	Polyesters	409
13.3		Catalysts	409

13.4	Comparison	410
13.5	MCU elastomers in automotive applications	410
14.	Microcellular Polyurethane (MCU)	411
14.1	Principles of MCU applications	411
14.2	Development examples of automotive components	414
14.3	Component behavior prediction through FEA (Finite Element Analysis)	417
14.3.1	Poisson's ratio	417
14.3.2	Polynomial fit analysis	417
14.4	Body mounts and suspension mounts	420
14.5	Application examples for MCU	421
14.5.1	Noise reduction	421
14.5.2	Impact transmissibility	423
14.5.3	Weight reduction	424
14.6	Summary	424
	Appendix	425
	Index of chapters and authors	425
	Acronyms	426
	References	428
	Further reading	431
	Illustration credits	432
	Index	433

Part 1 Fundamentals

1. Vibration Control Technology for the Automotive Industry

1.1 Fundamentals and requirements of vibration control technology

Reduced fuel consumption with improved vehicle performance, improved comfort and safety without added cost – this multifaceted challenge has motivated the automotive industry for years. Customers demand vehicles offering operating economy and value for their money, yet at the same time, vehicles that are dynamic and comfortable. Simultaneously, regulatory emissions limits become ever more stringent. The task of automotive manufacturers is to simultaneously satisfy multiple, conflicting goals. Manufacturers must produce energy-efficient, comfortable, safe and dynamic vehicles, at competitive prices. To this end, the supplier industry supports manufacturers with single-source vibration control technology solutions. Alongside engineering requirements such as lightweight design, downsizing, downspeeding, engine start-stop systems, engine cylinder deactivation and alternative propulsion technologies, rising cost pressures add another challenge to the vibration engineer's mission. Lighter vehicle structures demand special solutions, for example by integrating the masses on hand within vibration-relevant components. Downsizing of engines, downspeeding, start-stop systems and cylinder deactivation reduce weight and fuel consumption, but demand optimized engine mounting concepts, transmissions or starters – and in some cases even require additional measures such as balance shafts, dual-mass flywheels, or adaptive vibration control.

Alternative propulsion systems also demand additional measures to isolate high-frequency drivetrain noises emanating from electric motors, or annoying vibrations and noises generated by a range extender. The buyer of a premium luxury sedan does not expect to detect a difference between a four- or six-cylinder engine in terms of comfort and noise level. Beyond engineering advancements, vibration control technology is also subject to new challenges in development and production in response to market changes. In the future, volume growth will be driven more strongly by vehicles in the so-called "A" and "B" segments (US EPA minicompact and subcompact classes). And increasingly, these smaller vehicles will no longer be built in Europe. The development of innovative components for this market demands consistent application of "Design to Cost" methods, and a well grounded understanding of the needs and requirements in new markets with high growth potential, e.g. Asia. Expansion of regional development capacities will become even more important in the future.

1.2 Vibration control technology in automotive engineering

When the conversation is about ride comfort, everyone claims to know what is meant. Yet describing this "comfort" is a very complex task. Among other objectives, this volume is intended to provide the foundation to give us a better grasp of the concepts that will

appear repeatedly in connection with vibration control technology. Modern passenger cars offer a high level of driving safety, combined with outstanding ride comfort. In everyday use, we are hardly aware of this – we have come to take it for granted. We would have to go back 25 years to “experience anew” a vehicle of that era, to evaluate the development progress that has been achieved since then. This progress is the end result of a steady stream of small improvements. If we could go back in time, we would once again encounter our old “friends,” the idiosyncrasies of those vehicles of a bygone time. After starting, the engine reports for duty with idle shudder. Upon setting the vehicle in motion, we experience drive-off and load change bucking – annoying, impulse-like vibrations, described by some at the time as the “Bonanza effect” – for its similarity to the Cartwright clan bouncing along in their saddles in the television Western series of the same name.

Today, all of these so-called NVH (noise, vibration, and harshness) phenomena have been largely eliminated. The acronym NVH describes the totality of all occurring disturbances and their subjective perception by the vehicle occupants. These phenomena are classified according to their frequency, source, and disturbing effect, into the categories noise, vibration, and harshness (Figure 1-1). Undesirable vibrations and noises originate primarily from the combustion engine and are transmitted to the vehicle cabin as structure-borne noise and airborne noise. The suspension, too, transmits road irregularities through elastokinematic connecting elements – rubber and metal components. These are perceptible as vibrations felt at the steering wheel, seat rails, or floorpan, or in the form of undesirable noises.

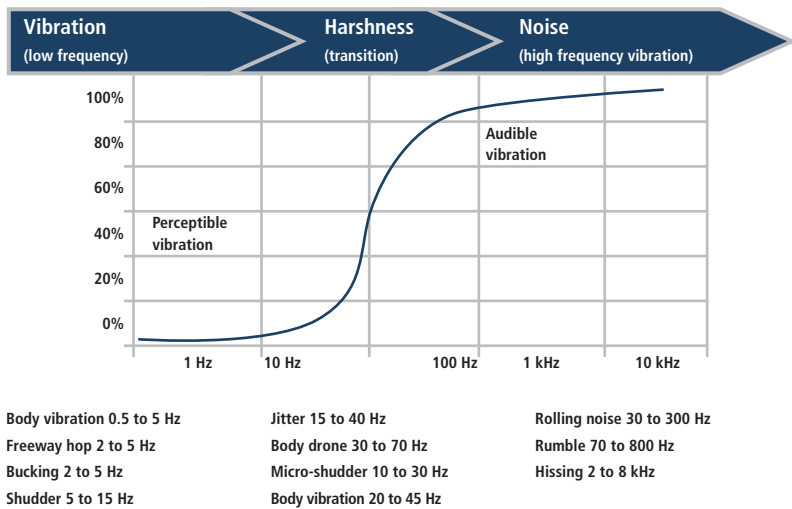


Figure 1-1. Relationship between vibration frequency and subjective perception as vibration, harshness, and noise.

For noises, the bandwidth of unpleasant effects ranges from making verbal communication difficult, to detrimental effects in listening to music, all the way to dizziness and hearing damage. The effects of more powerful and sustained vibration may range from numbness, dizziness, and loss of equilibrium to visual impairment and, in extreme cases, for example long-term exposure to construction equipment, cellular damage.

Physically perceptible, unpleasant vibrations arise in the automotive body structure and are propagated strictly as structure-borne noise – in other words, they may be felt, but are not audible. On poor road surfaces, engine shudder – a periodic vertical oscillation of the engine mass – is especially annoying. This induces a continuous shaking of the front end, which was often (erroneously) attributed to a badly tuned “shuddery” front suspension.

Subjective perception becomes problematic when vibrations can be felt as well as heard. Therefore, such disturbances should be avoided if at all possible. One example is high engine speeds, which could lead to body drone. At frequencies between 80 and 100 Hz, these are perceived as very unpleasant.

The transition regime from tactile to audible vibration or noise is designated as “harshness.” This encompasses the frequency range from 15 to 100 Hz. Such disturbances are created by the road itself, and torsional vibration of the combustion engine. In the lower frequency range, perception is dominated by the tactile components; above 100 Hz, however, the audible components govern the disturbing effect.

Audible vibration at frequencies above 100 Hz are designated as “noise.” Examples include rolling noise from the tires, or the high-frequency hum of an electrical machine, reminiscent of the sound made by a streetcar or tram.

In order to improve the noise comfort level, it is not sufficient to focus only on the noise range. Rather, an expanded frequency range, encompassing the entire harshness band, must be considered in order to capture all significant disturbances and eliminate them through targeted measures.

In the past few years, development engineers and vehicle acoustic experts have largely solved these vibration problems, and rubber, as an engineering material, continues to play a critical role. Vehicle acousticians have improved interior sound insulation; electronically controlled suspensions incorporating air springs permit the highest possible ride comfort without sacrificing vehicle dynamics or safety (Figure 1-2). Development engineers have optimized the engines and their mounts. Today, idle shudder or the characteristic knock of a diesel engine are things of the past. Acoustically, the modern diesel is hardly distinguishable from a gasoline engine.

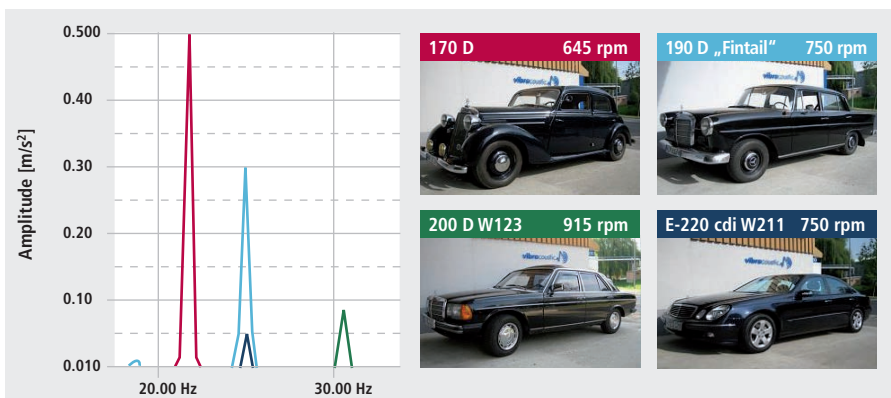


Figure 1-2. Seat rail acceleration at idle for Mercedes-Benz vehicles of various epochs.

2. Isolation, Damping, and Absorption

2.1 A material becomes predictable

“Rubber is black and sticky. It has an unpleasant odor and its properties change from batch to batch.” For more than 40 years, prejudices like these were used to explain both successes and failures in the rubber industry. It was difficult to make predictions, many phenomena could not be precisely explained, and there was little hope of reliably calculating the properties of a rubber mount, such as its isolation potential or its service life.

Good design solutions could only be produced by experienced “old hands” who used an empirical approach, their experience and perseverance to achieve success. Often, the physical effects of rubber in vibration isolation could only be explained on the basis of vague observations. No clear distinctions were drawn between terms such as isolation and damping. This uncertainty led to the assumption that a large rubber volume would be conducive to effective isolation. As a result, vehicle designers made considerable efforts to provide space for bulky mounts.

An engine mount from a 1985 Volkswagen Golf (Figure 2-1) is a good example: As the illustration shows, there is a large space between the inner metal sleeve, the core, and the outer steel ring. Designers expected that vibrations would be reduced on their way through the rubber; at least, this was what was hoped. Small connecting legs between the main body and the outer metal part, and a large exposed area of rubber, were intended to improve the balance between vibration energy reaching the mount and vibration transferred to the vehicle body.



Figure 2-1. Engine mount of a Volkswagen Golf II, 1985.

We now know that these conceptions of the physical principles of isolation were erroneous. Rubber does not isolate noise and vibration in some sort of magical way, but is a normal material that behaves in accordance with precise physical laws. Admittedly, these laws are complex. It took some time to understand the behavior of the material and to ensure that it could be described in mathematical terms. Now we are in a position to explain the term “isolation” and to predict this effect using simulation calculations with a high degree of precision at an early stage in a project.

2.2 The principles of vibration isolation

When installed, every rubber mount acts as a spring. However, a spring alone cannot provide an isolating effect. This can be explained using a simple example. A spring is positioned on a foundation and a force is applied to its loose end. The force compresses the spring which then transfers it to the foundation without any amplification or attenuation. The spring rate (i.e. whether the spring is “hard” or “soft”) is immaterial. Nor does it matter whether the load on the spring is changed gradually or suddenly. The load applied to the top of the spring is transferred to the base. A spring therefore does not have an isolating effect. At most, it can only delay the transfer of a force.

Vibration can only be created by a dynamic system consisting of a spring and a mass. In the case of an engine mount, it is easy to identify the two elements. The engine is the mass and the mounts, irrespective of whether three, four or five are installed, represent the elastic springs. The result is a spring-mass system. In the case of the chassis, the situation is considerably less clear. “Masses” in this case may include the hub carrier, suspension struts and control arms, the subframe or the differential.

An oscillating system only needs excitation in order to oscillate with different displacements (amplitudes) or speeds (frequencies). Physicists were able to give a mathematically precise description of the oscillation phenomenon more than 100 years ago. The solution is presented in terms of transmission behavior (Figure 2-2) and may be explained as follows: A harmonic force of alternating direction is applied to the mass, first pulling the mass upwards and then pushing it downwards, extending or compressing the spring. The product of spring travel and stiffness is the response force transmitted to the foundation. If the force transmitted is lower than the force applied, the system has an isolating effect; if a higher force is transmitted, the system amplifies the oscillation. In other words, an oscillating system can have a damping effect without any additional damping elements; on the other hand, it can just as easily have an amplifying effect.

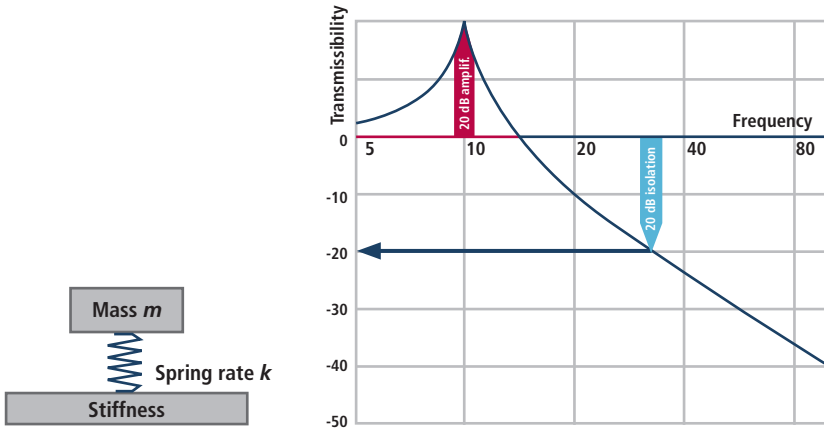


Figure 2-2. Transmission behavior of an oscillating system.

Which of the two possibilities occurs depends on the speed at which the force changes direction. If the direction is changed very rapidly, the mass will be unable to follow, due to inertia. It will react too slowly and will only oscillate with scarcely perceptible amplitude. Multiplied by the spring rate, these very low amplitudes result in the transmission of very low forces to the foundation (such as the body of a vehicle). If the magnitude of the exciting force remains constant but the speed at which it changes direction is reduced in very small steps, the oscillation amplitude will increase. Multiplied by the same spring rate, this means that the response force of the spring also increases. In the event that the exciting frequency matches the eigenfrequency of the oscillating system, the response force may even be many times higher than the exciting force. In this case, the spring-mass system no longer isolates the exciting force but amplifies it. With reference to an automobile, the forces that change direction at varying speed may be the combustion forces of the engine; the frequency of direction changes depends on the engine speed. Figure 2-3 gives a mathematically correct presentation of this situation. The vibration frequency is plotted on the horizontal axis, while the vertical axis above zero indicates amplification and the vertical axis below zero attenuation of the exciting force. The example shows a spring-mass system (schematically representing a simple engine mount) which has been tuned to an eigenfrequency of 10 Hz at the mass of the engine by selecting appropriate spring stiffness.

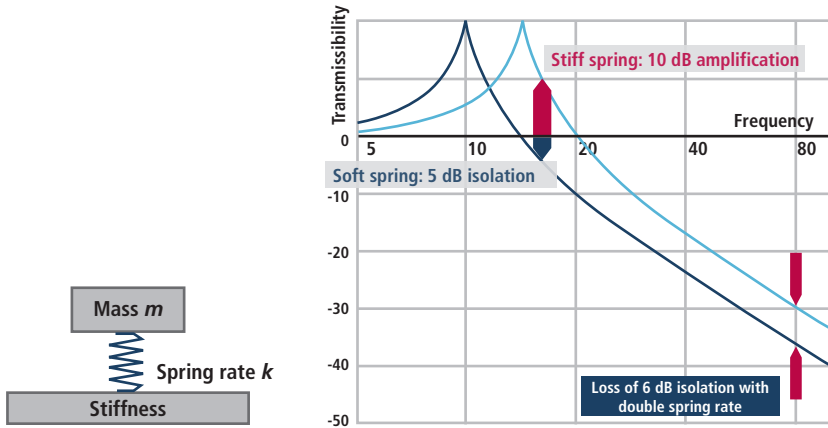


Figure 2-3. Doubling the spring rate results in a 6 dB loss in isolation.

Depending on the design of the engine (number and configuration of cylinders) and the operating speed, the engine excites a number of different frequencies across a wide range. At an idling speed of 600 rpm, a single-cylinder four-stroke engine generates five pulses per second, as against 20 pulses per second for a four-cylinder inline engine at the same speed.

If we assume that the engine masses are the same, the same spring (i.e. the same engine mount) would provide 2 dB amplification in the case of a single-cylinder engine and 10 dB isolation in the case of a four-cylinder engine. However, the situation is even worse: As engine speed increases, the main exciting force of the single-cylinder engine increases, finally reaching the eigenfrequency. In our example, this effect leads to massive resonance at 1,200 rpm before the isolation range is finally reached at 1,700 rpm. In contrast, the isolating effect becomes more pronounced for the four-cylinder engine, making it more refined.

As a second example, consider two engines of different mass but identical configuration, mounted on identical springs. In the case of the first engine, its mass and elastic mounting lead to an eigenfrequency of 15 Hz. For the second engine, with half the mass of the first, this frequency slips to 21 Hz. At an idle speed of 600 rpm, the mounts of the first engine are at the limit of isolation, while for the lighter engine, the same mounting, i.e. identical mounting elements, would result in unacceptable idle shudder. The actual conditions in a car are considerably more complicated than those considered in these examples.

In its elastic mounts, an engine can move in all three directions and rotate about three axes, resulting in pitching, rolling and yawing. An engine does not have just one eigenfrequency, as assumed in the examples above for the sake of simplicity, but six different eigenfrequencies with completely different vibration modes, which may be coupled with each other. The springs (or mounts) are not installed on a rigid foundation but on elastic body structures. As a result, the vibration amplitude of the engine does not necessarily result in corresponding travel in the rubber mounts. The spring travel of the base of the mount must be taken into account with the appropriate sign, depending on the excitation frequency and the phase configuration.

The situation is further complicated by the fact that, in practical applications, a rubber mount does not react with a single “spring rate”. In simulations, the properties of a mount are not normally characterized by a single parameter but by six measured values.

In addition to the three displacement values, key rotational values plus the torsional and flexural stiffness values must be taken into account in the case of chassis bushings. The measurement of these values calls for complex instrumentation and fixtures, and represents the main challenge. It is only in a few exceptional cases that measurements produce linear force/travel characteristic curves. Typically, the measurement curves are nonlinear and measurements indicate different spring rates as a function of pre-load, test velocity, test amplitude and loading history. The spring rates of a rubber supporting spring after a few load cycles will be completely different from the values measured prior to conditioning. It may also be significant to observe that a spring element with preload in one direction will react with completely different properties in other directions. For example, a mount may become stiffer in the direction of travel if it is bearing the weight of the engine or has to support torque at different engine speeds and with different transmission ratios. Radial preload on a chassis bushing may affect the spring properties in the torsional and flexural directions.

Precise, detailed test specifications are essential for systematic component development and for comparison measurements by suppliers and customers. However, there is one complex question that a test specification cannot answer: "Will this component achieve perfect results as regards safety, comfort and durability when it is installed in the vehicle?"

This question is difficult to answer. In many applications, it is not possible to make a reliable prediction. The objective of this book is to assist in finding solutions to this problem.

2.3 Four-pole theory: an approach to describing the isolation of high frequencies

This section lays the theoretical foundations required for describing vibration transmission and isolation effects. Mechanical impedances and four-pole networks can describe the dynamic behavior of components and interfaces. On this basis, it is possible to derive a number of isolation values that are useful for the analysis and assessment of designs. The following section deals with mechanical impedances. Instead of these impedances, it is also possible to consider dynamic or apparent masses or input stiffness; the parameters can be converted into each other. *Sell* [2-1] gives a comprehensive description of the theory with examples.

2.3.1 Mechanical impedance

The mechanical impedance is the resistance of a linear elastic body to an external force. Impedance is defined as the ratio of the force applied, F to the velocity of the point to which it is applied \underline{v} :

$$\underline{Z} = \frac{F}{\underline{v}}, \quad \text{Eq. (2-1).}$$

If two bodies (e.g. masses) are moved at the same velocity at a connected point, the force applied is opposed by the sum of the impedances of the two bodies.

$$\underline{Z}_{\text{total}} = \underline{Z}_1 + \underline{Z}_2, \quad \text{Eq. (2-2).}$$

If the same force is applied via two bodies (e.g. springs), the effective impedance is given by:

$$\frac{1}{Z_{\text{total}}} = \frac{1}{Z_1} + \frac{1}{Z_2}, \quad \text{Eq. (2-3)}$$

Often, other parameters are considered instead of impedance. Within the frequency range, all these parameters can be converted into each other. For the determination of impedance, it is normal practice to measure force and acceleration \underline{a} . The impedance can then be calculated using the angular frequency ω by:

$$Z = \frac{F}{v} = \frac{F}{\underline{a}} j\omega, \quad \text{Eq. (2-4)}$$

This formula is very useful if the input impedance of a structure is to be determined experimentally using an impulse hammer or shaker. Some formulas for calculating the impedance of ideal components are given in Table 2-1.

Table 2-1. Impedances of idealized components.

Component	Impedance	Symbols
Mass	$Z_m = j\omega m$	m : mass
Spring	$Z_k = \frac{k}{\omega m}$	k : spring constant
Viscous damper	$Z_c = c$	c : damping coefficient

The formulas indicate that impedance is a function of frequency. To better illustrate this relationship, Figure 2-4 shows characteristic plots of impedance and dynamic mass. The expressions in parentheses indicate the relevant proportionality factors, i.e. the extent to which the value is dependent on frequency.

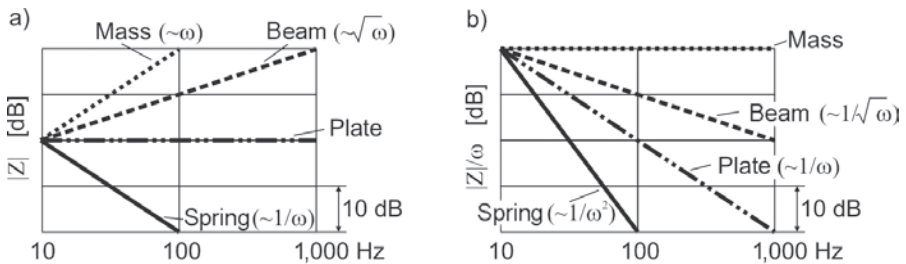


Figure 2-4. Characteristic curves: a) impedances, b) dynamic masses.

2.3.2 Mechanical four-pole systems

Mechanical four-pole systems were derived in the mid-20th century from the frequently used electrical four-pole system models. They represent a convenient approach to the simple presentation of relationships between mechanical components. Two inputs and

two outputs are always considered. Each of the pairs consists of one force value and one displacement, velocity or acceleration value. The index 1 is used for inputs and the index 2 for outputs. Indices 12 and 21 represent transmission values. In the following paragraphs, as in the case of impedances, velocities are considered.

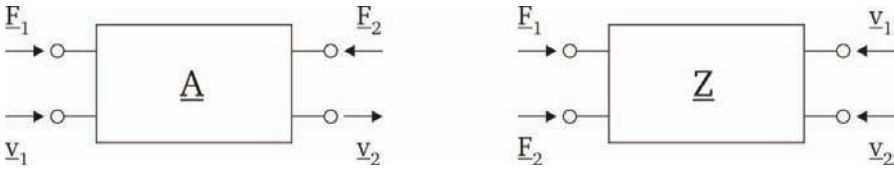


Figure 2-5. Mechanical four-pole systems in chain form (left) and impedance form (right).

As we will see, the chain form is especially well-suited for the calculation of series connections. Expressed as matrices, the following equations apply to the four-pole system shown in Figure 2-5:

$$\begin{bmatrix} F_1 \\ v_1 \end{bmatrix} = \begin{bmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{bmatrix} \cdot \begin{bmatrix} F_2 \\ v_2 \end{bmatrix} = \underline{[A]} \cdot \begin{bmatrix} F_2 \\ v_2 \end{bmatrix} \text{ (chain form),} \quad \text{Eq. (2-5)}$$

$$\begin{bmatrix} F_1 \\ F_2 \end{bmatrix} = \begin{bmatrix} z_{11} & z_{12} \\ z_{21} & z_{22} \end{bmatrix} \cdot \begin{bmatrix} v_1 \\ v_2 \end{bmatrix} = \underline{[Z]} \cdot \begin{bmatrix} v_1 \\ v_2 \end{bmatrix} \text{ (impedance form),} \quad \text{Eq. (2-6)}$$

Table 2-2 shows the four-pole parameters in chain form for certain ideal components or assemblies.

Table 2-2. Four-pole parameters of idealized components.

Component	Impedance	Symbols
Mass	$\underline{[A]} = \begin{bmatrix} 1 & j\omega m \\ 0 & 1 \end{bmatrix}$	m : mass
Spring	$\underline{[A]} = \begin{bmatrix} 1 & 0 \\ j\omega & 1 \\ k & \end{bmatrix}$	k : spring constant
Viscous damper	$\underline{[A]} = \begin{bmatrix} 1 & 0 \\ 1 & 1 \\ c & \end{bmatrix}$	c : damping coefficient
Oscillator (design, see below)	$\underline{[A]} = \begin{bmatrix} 1 & j\omega m \\ \frac{1}{c + \frac{k}{j\omega}} & \frac{j\omega m + c + \frac{k}{j\omega}}{c + \frac{k}{j\omega}} \end{bmatrix}$	

Table 2-2 (continued).

Component	Impedance	Symbols
Absorber (design, see below)	$[\underline{A}] = \begin{bmatrix} 1 & \frac{j\omega m}{j\omega m + c + \frac{k}{j\omega}} \\ c + \frac{k}{j\omega} & 1 \end{bmatrix}$	

The mechanical configuration of the oscillator and the absorber is shown by the following two diagrams (Figures 2-6 and 2-7).

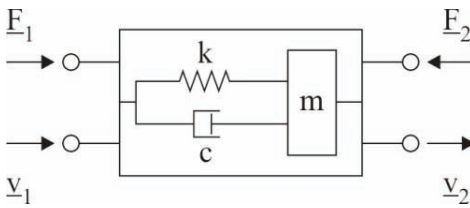


Figure 2-6. Four-pole representation of an oscillator.

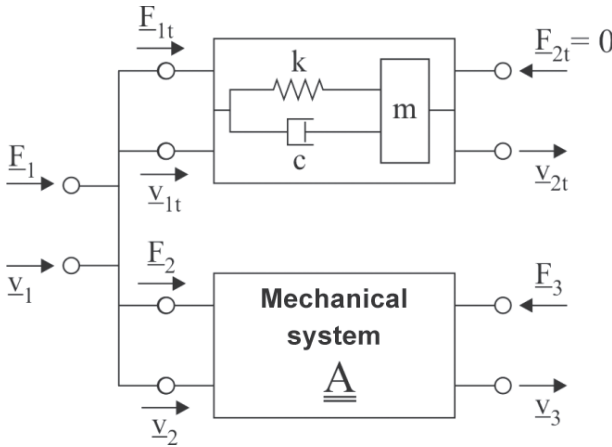


Figure 2-7. Four-pole representation of an absorber.

2.3.3 Coupling of four-pole systems

One of the major advantages of four-pole modeling is that it allows easy mathematical treatment of an entire network of mechanical components. In order to take coupling within the network into account, each subsystem may be described in terms of a four-pole system. These are combined mathematically to form an overall four-pole system, allowing the modeling of complex structures. It is then possible to calculate the effectiveness of absorbers or other structures more easily than using differential equations.

In the case of parallel connections, all the interconnected components must be exposed to the same vibration frequency. If subsystems are connected in series, the appropriate four-pole systems must be presented in chain form as the output variables of each four-pole system in the series are also the input variables for the next four-pole system. The subsystems are exposed to the same flow of force and the overall chain matrix $\underline{\underline{A}}_{\text{total}}$ is given by

$$\underline{\underline{A}}_{\text{total}} = \prod_{i=1}^n \underline{\underline{A}}^i, \quad \text{Eq. (2-7).}$$

If the input values of several subsystems are rigidly linked, they have identical velocities and the sum of the forces on the input and output side represents the total force in each case (parallel configuration); therefore the overall impedance matrix $\underline{\underline{Z}}_{\text{total}}$ is given by

$$\underline{\underline{Z}}_{\text{total}} = \sum_{i=1}^n \underline{\underline{Z}}^i, \quad \text{Eq. (2-8).}$$

Molloy [2-2] has developed a set of equations allowing n four-pole systems to be connected in parallel in chain form. This means that it is not necessary to switch between chain form and impedance form:

$$\underline{\underline{A}}_{\text{total}} = \begin{bmatrix} \underline{a}_{11}^{\text{total}} = \frac{A}{B} & \underline{a}_{12}^{\text{total}} = \frac{AC}{B} - B \\ \underline{a}_{21}^{\text{total}} = \frac{1}{B} & \underline{a}_{22}^{\text{total}} = \frac{C}{B} \end{bmatrix} \quad \text{Eq. (2-9),}$$

where $A = \sum_{i=1}^n \left(\frac{\underline{a}_{11}^i}{\underline{a}_{21}^i} \right)$, $B = \sum_{i=1}^n \left(\frac{1}{\underline{a}_{21}^i} \right)$, $C = \sum_{i=1}^n \left(\frac{\underline{a}_{22}^i}{\underline{a}_{21}^i} \right)$.

Figure 2-8 shows two four-pole systems $\underline{\underline{A}}^1$ and $\underline{\underline{A}}^2$ connected via force \underline{F}_2 and velocity \underline{v}_2 .

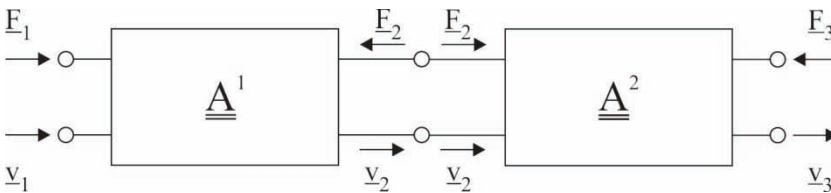


Figure 2-8. Two mechanical four-pole systems connected in series.

The two four-pole systems are available in chain form and can therefore be combined to form an overall chain matrix $\underline{\underline{A}}_{\text{total}}$ using equation (2-7):

$$\begin{bmatrix} \underline{F}_1 \\ \underline{v}_1 \end{bmatrix} = \begin{bmatrix} \underline{a}_{11}^{\text{total}} & \underline{a}_{12}^{\text{total}} \\ \underline{a}_{21}^{\text{total}} & \underline{a}_{22}^{\text{total}} \end{bmatrix} \cdot \begin{bmatrix} \underline{F}_3 \\ \underline{v}_3 \end{bmatrix}, \quad \text{Eq. (2-10).}$$

In explicit form, the following equation applies to the overall chain matrix:

$$\underline{A}_{\text{total}} = \begin{bmatrix} \underline{a}_{11}^{\text{total}} & \underline{a}_{12}^{\text{total}} \\ \underline{a}_{21}^{\text{total}} & \underline{a}_{22}^{\text{total}} \end{bmatrix} = \begin{bmatrix} \underline{a}_{11}^1 \underline{a}_{11}^2 + \underline{a}_{12}^1 \underline{a}_{21}^2 & \underline{a}_{11}^1 \underline{a}_{12}^2 + \underline{a}_{12}^1 \underline{a}_{22}^2 \\ \underline{a}_{21}^1 \underline{a}_{11}^2 + \underline{a}_{22}^1 \underline{a}_{21}^2 & \underline{a}_{21}^1 \underline{a}_{12}^2 + \underline{a}_{22}^1 \underline{a}_{22}^2 \end{bmatrix}, \quad \text{Eq. (2-11).}$$

2.3.4 Isolation calculations using four-pole systems

The modeling method presented above using mechanical four-pole systems is especially well-suited for calculating isolating effects.

In general, it is beneficial to take vibration control action as near as possible to the source of the vibration. The action may reduce the sound energy emitted by the source or reflect the sound energy back to the source with a view to increasing damping by causing the sound to pass repeatedly through sound-absorbing structural elements. Structural elements suitable for reducing vibration may include heavy masses and soft springs with and without damping, as well as combinations of such components. In order to quantify the isolating effect of individual elements, two main “loss” parameters are used. The *transmission loss* is the ratio of power or speed upstream from and downstream from an isolating element. The *insertion loss* is a far more effective parameter for describing the effect of isolating elements. It is the ratio of the power and velocity at the “receiving end” of a structure with the isolating element in place to the same value without the isolating element. This value gives a direct indication of the effects of the change in isolation on the dynamics of the overall system.

2.3.4.1 Transmission loss

The following equations for loss values may be derived from the basic equation for mechanical four-pole systems:

$$\underline{F}_1 = \underline{a}_{11} \underline{F}_2 + \underline{a}_{12} \underline{v}_2 \quad \text{Eq. (2-12);}$$

$$\underline{v}_1 = \underline{a}_{21} \underline{F}_2 + \underline{a}_{22} \underline{v}_2 \quad \text{Eq. (2-13).}$$

In the case of transmission loss, it is necessary to distinguish two values.

2.3.4.2 Transmission loss with reference to velocity

With the terminating impedance

$$\underline{Z}_t := \frac{\underline{F}_2}{\underline{v}_2} \quad \text{Eq. (2-14),}$$

the transmission loss with reference to velocity may be derived from equation (2-13)

$$\underline{D}_{\text{dv}} := \frac{\underline{v}_1}{\underline{v}_2} = \underline{a}_{22} + \underline{a}_{21} \underline{Z}_t, \quad \text{Eq. (2-15).}$$